
Decomposed Mutual Information Optimization for Generalized Context in Meta-Reinforcement Learning

Yao Mu
The University of Hong Kong
muyao@connect.hku.hk

Yuzheng Zhuang
Huawei Noah's Ark Lab
zhuangyuzheng@huawei.com

Fei Ni
Tianjin University
fei_ni@tju.edu.cn

Bin Wang
Huawei Noah's Ark Lab
wangbin158@huawei.com

Jianyu Chen
Tsinghua University
jianyuchen@tsinghua.edu.cn

Jianye Hao
Huawei Noah's Ark Lab
haojianye@huawei.com

Ping Luo *
The University of Hong Kong
pluo@cs.hku.hk

Abstract

Adapting to the changes in transition dynamics is essential in robotic applications. By learning a conditional policy with a compact context, context-aware meta-reinforcement learning provides a flexible way to adjust behavior according to dynamics changes. However, in real-world applications, the agent may encounter complex dynamics changes. Multiple confounders can influence the transition dynamics, making it challenging to infer accurate context for decision-making. This paper addresses such a challenge by **DecOMposed Mutual INformation Optimization (DOMINO)** for context learning, which explicitly learns a disentangled context to maximize the mutual information between the context and historical trajectories, while minimizing the state transition prediction error. Our theoretical analysis shows that DOMINO can overcome the underestimation of the mutual information caused by multi-confounded challenges via learning disentangled context and reduce the demand for the number of samples collected in various environments. Extensive experiments show that the context learned by DOMINO benefits both model-based and model-free reinforcement learning algorithms for dynamics generalization in terms of sample efficiency and performance in unseen environments. Open-sourced code is released on our [homepage](#).

1 Introduction

Dynamics generalization in deep reinforcement learning (RL) investigates the problem of training a RL agent in a few kinds of environments and adapting across unseen system dynamics or structures, such as different physical parameters or robot mythologies. Meta-Reinforcement Learning (Meta-RL) has been proposed to tackle the problem by training on a range of tasks, and fast adapting to a new task with the learned prior knowledge. However, training in meta-RL requires orders of magnitudes more samples than single-task RL since the agent not only has to learn to infer the change of environment but also has to learn the corresponding policies. Context-aware meta-RL methods take a step further and show promising potential to capture local dynamics explicitly by learning an

*Ping Luo is the corresponding author. Yao Mu and Fei Ni conducted this work during the internship in Huawei Noah's Ark Lab.

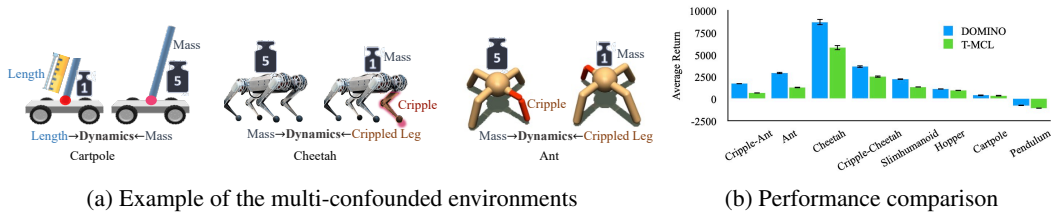


Figure 1: Generalization with complex dynamics changes. The transition dynamics of the robot may simultaneously influenced by multiple confounders, such as mass (5), length of leg (—), or a crippled leg (⚡). In real-world situations, all the possible confounders may change simultaneously, which bring challenges to robotic dynamics generalization. DOMINO addresses such problem by decomposed MI optimization and achieves the state-of-the-art performance.

additional context vector from historical trajectories [1–4]. The historical trajectories are sampled from the joint distribution of multiple confounders, which are the key factors that cause the dynamics changes. Accordingly, if multiple confounders affect the dynamics simultaneously, the state transition distribution will become highly multi-modal, leading to challenges in extracting accurate context.

Recent advanced context-aware meta-RL methods [5–8] further improve meta-RL via contrastive learning, which optimizes the InfoNCE bound [9] of the mutual information in essence. These methods show a promising improvement in entangled context learning, which performs well in single confounded environments. However, as demonstrated in Figure 1a, in real-world situations for robotic applications with partially unspecified dynamics, the transition dynamics can be influenced by multiple confounders simultaneously, such as mass changes, damping, friction, or malfunctional modules like a crippled leg. For example, when a transportation robot is working in the wild, the load will dynamically change as the task progresses, while the humidity and roughness of the road also may vary. Moreover, some works also construct a confounder set for unsupervised RL environment generalization[10–15]. RIA [16] also constructs confounder sets with multiple confounders for unsupervised dynamics generalization. Such changeable environments bring great challenges to the robot for capturing contextual information, which motivates our study.

Contribution. In this paper, we give a theoretical analysis which demonstrates that when the number of confounders increases, InfoNCE will be a loose bound of mutual information (MI) with the samples in limited seen environments, which is called MI underestimation [17]. To tackle this problem, we propose a **DecOMposed Mutual INformation Optimization (DOMINO)** framework for context learning in meta-RL. The context encoder aims to embed the past state-action pairs into disentangled context vectors and is optimized by maximizing the mutual information between the disentangled context vectors and historical trajectories while minimizing the state transition prediction error. DOMINO decomposes the full MI optimization problem into a summation of N smaller MI optimization problems by learning disentangled context. We then theoretically prove that DOMINO could alleviate the underestimation bias of the InfoNCE and reduce the demand for the samples collected in various environments [18, 19]. Last, with the learned disentangled context, we further develop the context-aware model-based and model-free algorithms to learn the context-conditioned policy and illustrate that DOMINO can consistently improve generalization performance in both ways to overcome the challenge of multi-confounded dynamics.

Extensive experiments demonstrate that DOMINO benefits meta-RL on both the generalization performance in unseen environments and sample efficiency during the training process under the challenging multi-confounded setting. For example, as show in Figure 1b, it achieves 1.5 times performance improvement to T-MCL [3] in the Cheetah domain and 2.6 times performance improvement to T-MCL in the Crippled-Ant domain. Visualization of the learned context demonstrates that the disentangled context generated by DOMINO under different environments could be more clearly distinguished in the embedding space, which indicates its advantage to extract high-quality contextual information from the environment.

2 Related Work

2.1 Meta-Reinforcement Learning

Meta-RL extends the framework of meta-learning [20, 21] to reinforcement learning, aiming to learn an adaptive policy being able to generalize to unseen tasks. Specifically, meta-RL methods

learn the policy based on the prior knowledge discovered from various training environments and reuse the policy to fast adapt to unseen testing environments after zero or few shots. Gradient-based meta-RL algorithms [22–25] learn a model initialization and adapt the parameters with few policy gradient updates in new dynamics. Context-based meta-RL algorithms [1–4] learn contextual information to capture local dynamics explicitly and show great potential to tackle generalization tasks in complicated environments. Many model-free context-based methods are proposed to learn a policy conditioned on the latent context that can adapt with off-policy data by leveraging context information and is trained by maximizing the expected return. PEARL [1] adapts to a new environment by inferring latent context variables from a small number of trajectories. Recent advanced methods further improve the quality of contextual representation leveraging contrastive learning [5–8]. Unlike the model-free methods mentioned above, context-aware world models are proposed to learn the dynamics with confounders directly. CaDM [26] learns a global model that generalizes across tasks by training a latent context to capture the local dynamics. T-MCL [4] combines multiple-choice learning with context-aware world model and achieves state-of-the-art results on the dynamics generalization tasks. RIA [16] further expands this method into unsupervised setting without environment label by intervention, and enhances the context learning via MI optimization.

However, existing context-based approaches focus on learning entangled context, in which each trajectory is encoded into only one context vector. In a multi-confounding environment, learning entangled contexts requires orders of magnitude higher samples to capture accurate dynamics information. To tackle this challenge, different from RIA [16] and T-MCL [4], DOMINO infers several disentangled context vectors from a single trajectory and divides the whole MI optimization into the summation of smaller ones. The proposed decomposed MI optimization reduces the amount of demand for diverse samples and thus improves the generalization of the policy to overcome the adaptation problem in multi-confounded unseen environments.

2.2 Mutual Information Optimization for Representation Learning

Representation learning based on mutual information (MI) maximization has been applied in various tasks such as computer vision [27, 28], natural language processing [29, 19], and RL [30], exploiting noise-contrastive estimation (NCE) [31], InfoNCE [9] and variational objectives [32]. InfoNCE has gained recent interest with respect to variational approaches due to its lower variance [33] and superior performance in downstream tasks. However, InfoNCE may underestimate the true MI, given that it is limited by the number of samples. To tackle this problem, DEMI [17] first scaffolds the total MI estimation into a sequence of smaller estimation problems. In this paper, since the confounders in the real world are commonly independent, we simplify the complexity of mutual information decomposition and eliminate the need to learn conditional mutual information as a sub-term, assuming that multiple confounders are independent of each other.

3 Preliminaries

We consider standard RL framework where an agent optimizes a specified reward function through interacting with an environment. Formally, we formulate our problem as a Markov decision process (MDP) [34], which is defined as a tuple $(\mathcal{S}, \mathcal{A}, p, r, \gamma, \rho_0)$. Here, \mathcal{S} is the state space, \mathcal{A} is the action space, $p(s'|s, a)$ is the transition dynamics, $r(s, a)$ is the reward function, ρ_0 is the initial state distribution, and $\gamma \in [0, 1)$ is the discount factor. In order to address the problem of generalization, we further consider the distribution of MDPs, where the transition dynamics $p_{\tilde{u}}(s'|s, a)$ varies according to multiple confounders $\tilde{u} = \{u_0, u_1, \dots, u_N\}$. The confounders can be continuous random variables, like the mass, damping, random disturbance force, or discrete random variables, such as one of the robot’s leg is crippled. We assume that the true transition dynamics model is unknown, but the state transition data can be sampled by taking actions in the environment. Given a set of training setting sampled from $p(\tilde{u}_{\text{train}})$, the meta-training process learns a policy $\pi(s, c)$ that adapts to the task at hand by conditioning on the embedding of the history of past transitions, which we refer as context c . At test-time, the policy should adapt to the new MDP under the test setting \tilde{u}_{test} drawn from $p(\tilde{u}_{\text{test}})$.

Our goal is to learn a policy to maximizing the expected return $\mathcal{R}_{\text{train}}$ condition on the context c which is encoded from the sequences of current state action pairs $\{s_\tau, a_\tau, s_{\tau+1}\}_{\tau=t-H}^t$ in several training

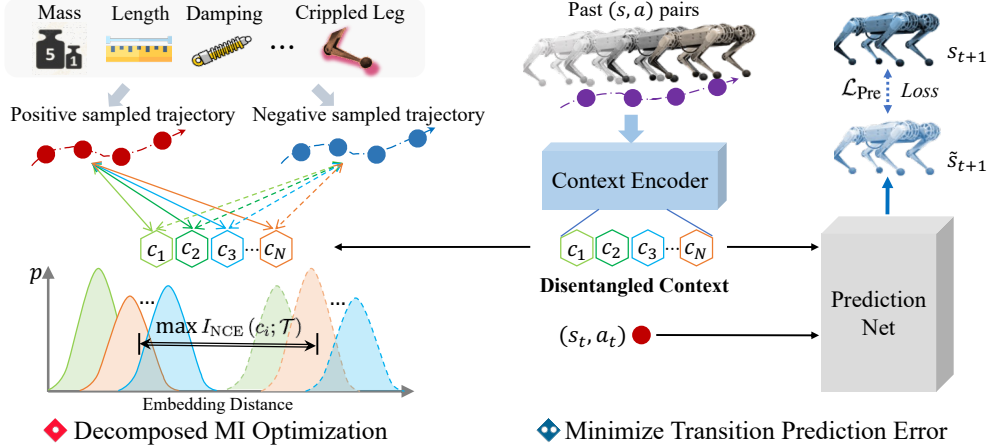


Figure 2: The overall framework of DOMINO (◆). The context encoder embeds the past state-action pairs (••) into disentangled context vectors. The disentangled context vectors (○) are learned via the decomposed mutual information optimization (◆) while minimizing the state transition prediction error (◆). **Minimize transition prediction error:** With the current state-action pair and the learned context vectors, future state can be predicted by the prediction network. The gradient of the prediction error will be used to update both the context encoder and the prediction network. **Decomposed MI Optimization:** we optimize the MI between the learned context and the historical trajectories under the same confounder setting via maximizing the InfoNCE bound, which aims to minimize the embedding distance between the positive sampled trajectories (••) and the context, while maximizing the embedding distance between the negative sampled trajectories (••) and the context.

scenarios and enable it to perform well and achieve a high expected return \mathcal{R}_{test} in test scenarios never seen before.

$$\max_{\pi} \left\{ \mathcal{R}_{\#} = \mathbb{E}_{\tilde{u} \sim p(\tilde{u}_{\#})} \left[\sum_{t=0}^{\infty} \gamma^t r(s_t, \mathbf{a}_t) \right] \right\}, \quad a_t \sim \pi(s_t, c), \quad \# = \{\text{"train" or "test"}\} \quad (1)$$

4 Decomposed Mutual Information Optimization for Context Learning

In this section, we first provide a theoretical analysis to show why the multi-confounded environments are more challenging. We find that when the number of confounders increases, the InfoNCE will be a loose bound of MI with the samples in limited seen environments, resulting in the underestimation of MI. To solve such a problem, we develop the DOMINO framework to learn disentangled context by decomposed MI optimization. We theoretically illustrate that the decomposed MI optimization can alleviate the underestimation of MI and reduce the demand for the number of samples. The disentangled context $c = \{c_0, c_1, \dots, c_N\}$ is embedded by the context encoder with parameter φ from the past state-action pairs $\tau^* = \{s_l^*, a_l^*\}_{l=t-H}^{t-1}$ in current episode. DOMINO explicitly maximizes the MI between the context c and the historical trajectories $\mathcal{T} = \{\tau^i\}_{i=1}^M$ ($\tau^i = \{s_l^i, a_l^i\}_{l=0}^T$) collected based on the combination of multiple confounders $\tilde{u} = \{u_0, u_1, \dots, u_N\}$ as same as the current confounder setting, while minimizing the state transition prediction error conditioned on the learned context. We solve the MI optimization problem by optimizing the InfoNCE lower bound on MI [9], which can be viewed as a contrastive method for the MI optimization, and decompose the full MI optimization into smaller ones to alleviate the underestimation of the mutual information and reduce the demand for the number of samples collected in various environments.

4.1 InfoNCE Bound for Mutual Information Optimization

InfoNCE bound $I_{\text{NCE}}(x; y)$ is a lower bound of the mutual information $I(x; y)$, where NCE stands for Noise-Contrastive Estimation, is a type of contrastive loss function used for self-supervised learning. InfoNCE is obtained by comparing pairs sampled from the joint distribution $x, y_1 \sim p(x, y)$ (y_1 is

called the positive example) to pairs x, y_i built using a set of negative examples, $y_{2:K} \sim p(y_{2:K}) = \prod_{k=2}^K p(y_k)$:

$$I(x; y) \geq I_{\text{NCE}}(x; y \mid \psi, K) = E \left[\log \frac{e^{\psi(x, y_1)}}{\frac{1}{K} \sum_{k=1}^K e^{\psi(x, y_k)}} \right] \quad (2)$$

where ψ is a function assigning a similarity score to x, y pairs and K denotes the number of samples. Through discriminating naturally the paired positive instances from the randomly paired negative instances, it is proved to bring universal performance gains in various domains, such as computer vision and natural language processing.

Lemma 1 $I_{\text{NCE}}(X; Y \mid K) \leq I(x; y) \leq \log K$ is a necessary condition for $I_{\text{NCE}}(X; Y \mid K)$ to be a tight bound of $I(x; y)$. (see proof in Appendix A)

Some previous context-aware methods learn an entangled context c by maximizing the mutual information between the context c embedded from the past state-action pairs in the current episode, and the historical trajectories \mathcal{T} collected under the same confounder setting as the current episode. They solve this problem by maximizing the InfoNCE lower bound on $I_{\text{NCE}}(c; \mathcal{T})$, which can be viewed as a contrastive estimation [9] of $I_{\text{NCE}}(c; \mathcal{T})$, and obtain promising improvement in single-confounded environment. However, according to Lemma 1, the $I_{\text{NCE}}(c; \mathcal{T})$ may be loose if the true mutual information $I(c; \mathcal{T})$ is larger than $\log K$, which is called underestimation of the mutual information. Therefore, to make the InfoNCE bound to be a tight bound of $I(c; \mathcal{T})$, the minimum number of samples is $e^{I(c; \mathcal{T})}$. In real-world robotic control tasks, the dynamics of the robot is commonly influenced by multiple confounders $\tilde{u} = \{u_0, \dots, u_i, \dots, u_j, \dots, u_N\}$ simultaneously, under the assumption that the confounders are independent (such as mass and damping), the mutual information between the historical trajectories \mathcal{T} and the context c can be derived as

$$\begin{aligned} I(c; \mathcal{T}) &= \mathbb{E}_{p(\tau, c)} \left\{ \log \frac{p(\mathcal{T} \mid c)}{p(\mathcal{T})} \right\} = \mathbb{E}_{p(\tau, c)} \log \left\{ \frac{\int p(\mathcal{T} \mid \tilde{u}) p(\tilde{u} \mid c) d\tilde{u}}{p(\mathcal{T})} \right\} \\ &\geq \mathbb{E}_{p(\tau, c) p(\tilde{u} \mid c)} \left\{ \log \frac{p(\mathcal{T} \mid \tilde{u})}{p(\mathcal{T})} \right\} = I(\tilde{u}; \mathcal{T}) \xrightarrow{u_i \perp u_j} \sum_{i=0}^N I(u_i; \mathcal{T}) \end{aligned} \quad (3)$$

As the number of confounders increases, the lower bound of $I(c; \mathcal{T})$ will become larger, and the necessary condition for $I_{\text{NCE}}(\mathcal{T}; c \mid K)$ to be a tight bound of $I(c; \mathcal{T})$ will become more difficult to satisfy. Since $I(c; \mathcal{T}) \geq \sum_{i=0}^N I(u_i; \mathcal{T})$, to let the necessary condition satisfied, the amount of data K must be larger than $e^{\sum_{i=0}^N I(u_i; \mathcal{T})}$ according to Lemma 1. Thus the demand for data increases significantly. Since the confounders are commonly independent in real-world, can we relax this condition by learning disentangled context vectors instead of entangled context intuitively?

4.2 Decomposed MI Optimization

If the context vectors $c = \{c_0, c_1, \dots, c_N\}$ can be independent, then we can ease this problem by applying the chain rule on MI to decompose the total MI into a sum of smaller MI terms, i.e.,

$$I_{\text{NCE}}(c; \mathcal{T} \mid K) = \sum_{i=0}^N \{I_{\text{NCE}}(c_i; \mathcal{T} \mid K)\} \leq N \log K \quad (4)$$

Theorem 1 *If the context vectors $\{c_0, c_1, \dots, c_N\}$ can be independent, then the necessary condition for $I_{\text{NCE}}(c; \mathcal{T})$ to be a tight bound can be relaxed to $I(c; \mathcal{T}) \leq N \log K = \log K^N$. Thus, the need of the number of samples can be reduced from $K \geq e^{I(c; \mathcal{T})}$ to $K \geq e^{\frac{1}{N} I(c; \mathcal{T})}$.*

Inspired by Theorem 1, we intuitively learn disentangled context vectors and maximize the mutual information between the historical trajectories \mathcal{T} and the context vectors $\{c_0, \dots, c_N\}$ while minimizing the I_{NCE} between the context vectors, i.e., to maximize the \mathcal{L}_{NCE}

$$\mathcal{L}_{\text{NCE}}(\varphi, w) = \sum_{i=0}^N I_{\text{NCE}}(c_i; \mathcal{T}) - \sum_{j=0}^N \sum_{i=0, i \neq j}^N I_{\text{NCE}}(c_i; c_j) \quad (5)$$

where the $I_{\text{NCE}}(c_i; \mathcal{T})$ can be obtained with the positive trajectory τ^+ and negative trajectories $\{\tau_k^-\}_{k=2}^K$, i.e.,

$$I_{\text{NCE}}(c_i; \mathcal{T}) = E \left[\log \frac{e^{\psi(c_i, h_w(\tau^+))}}{\frac{1}{K} \left(\sum_{k=2}^K e^{\psi(c_i, h_w(\tau_k^-))} + e^{\psi(c_i, h_w(\tau^+))} \right)} \right] \quad (6)$$

The context $c = \{c_0, \dots, c_i, \dots, c_N\}$ ($c_i \in \mathbb{R}^m$) is encoded from the past state action pairs τ^* in current episode by $g_\varphi(\cdot)$. Both the positive trajectory (collected in same setting of the confounders) and negative trajectory (collected in different setting of the confounders) are encoded to \mathbb{R}^m by $h_w(\cdot)$. The critic function $\psi(\cdot, \cdot)$ measures the cosine similarity between inputs by dot product after normalization. Under the assumption that the setting of confounders will not change in one episode, to obtain the $I_{\text{NCE}}(c_i; c_j)$, we use c_j^+ sampled from same episode like c_i as the positive example, and use c_j^- sampled from different episode as the negative example. Thus the $I_{\text{NCE}}(c_i; c_j)$ can be derived as

$$I_{\text{NCE}}(c_i; c_j) = E \left[\log \frac{e^{\psi(c_i, c_j^+)}}{\frac{1}{K} \left(\sum_{k=2}^K e^{\psi(c_i, c_j^{k-})} + e^{\psi(c_i, c_j^+)} \right)} \right] \quad (7)$$

Then, the future state s_{t+1} can be predicted with the the current state s_t , action a_t and the disentangled context vectors $\{c_{0_t}, \dots, c_{N_t}\}$ by the state transition prediction network $f_\phi(\cdot)$. We aim to minimize the prediction loss, which is equal to maximizing

$$\mathcal{L}_{\text{Pre}}(\varphi, \phi) = E_{\tau^* \sim \mathcal{B}} \left[-\frac{1}{H} \sum_{\lambda=t}^{t+H-1} \log f_\phi(s_{\lambda+1} | s_\lambda, a_\lambda, (c_{\lambda_0}, \dots, c_{\lambda_N})) \right], \tau^* = \{s_l^*, a_l^*\}_{l=t-H}^{t-1} \quad (8)$$

where \mathcal{B} is the training set, and H is the prediction horizon. The whole framework of DOMINO is demonstrated in Figure 2 and the overall objective function of DOMINO is

$$\mathcal{L}(\varphi, w, \phi) = \mathcal{L}_{\text{Pre}}(\varphi, \phi) + \mathcal{L}_{\text{NCE}}(\varphi, w) \quad (9)$$

4.3 Combine DOMINO with Downstream RL Methods

Combination with Model-based RL. With DOMINO we can learn the context encoder and the context-aware world model together. First, the past state-action pairs are encoded into the disentangled context vectors by the context encoder. According to the learned context, the transition prediction network predicts the future states of different actions. In particular, we use the cross entropy method (CEM) [35], a typical neural model predictive control (MPC) [36] method, to select actions, in which several candidate action sequences are iteratively sampled from a candidate distribution, which is adjusted based on best-performing action samples. The optimal action sequence $\mathbf{a}_{t:t+T} \doteq \{a_t, \dots, a_{t+T}\}$ can be obtained by

$$\operatorname{argmax}_{\mathbf{a}_{t:t+T}} \sum_{\lambda=t}^{t+T} \mathbb{E}_{\tilde{f}} [r(s_\lambda, \mathbf{a}_\lambda)], \quad \tilde{f} = \Pr(s_{t+1} | s_t, a_t, c_{t_0}, \dots, c_{t_N}) \quad (10)$$

Then, we use the mean value of adjusted candidate distribution as action and re-plan at every timestep. We provide detailed algorithm pseudo-code in the Appendix B.1. As for the adaptation process, the policy and context encoder zero-shot adapts to the unseen confounders setting $u_{t \in \text{st}}$, and we use the same adaptive planning method as T-CML[3], which selects the most accurate prediction head over a recent experience condition on the inferred context. The details is introduced in Appendix D.4

Combination with Model-free RL. Previous works show that a policy learned by model-free method can be more robust to dynamics changes when it takes the contextual information as an additional input [37–39]. Motivated by this, we investigate whether the context encoder learned by DOMINO can be used as a plug-and-play module to improve the final generalization performance of model-free RL methods. We concatenate the disentangled context encoded by a pre-trained context encoder from DOMINO and the current state-action pairs, and learn a conditional policy $\pi(a_t | s_t, c_0, \dots, c_N)$. We use the Proximal Policy Optimization (PPO) method to train the agent [40], which learns the policy by maximizing

$$\hat{\mathbb{E}}_t \left[\frac{\pi(a_t | s_t, c_{t_0}, \dots, c_{t_N})}{\pi_{\theta_{\text{old}}}(a_t | s_t, c_{t_0}, \dots, c_{t_N})} \hat{A}_t - \beta \text{KL}[\pi_{\theta_{\text{old}}}(\cdot | s_t, c_{t_0}, \dots, c_{t_N}), \pi(\cdot | s_t, c_{t_0}, \dots, c_{t_N})] \right] \quad (11)$$

where \hat{A}_t is the estimation of the advantage function at timestep t . We provide detailed pseudo-code in the Appendix B.2.

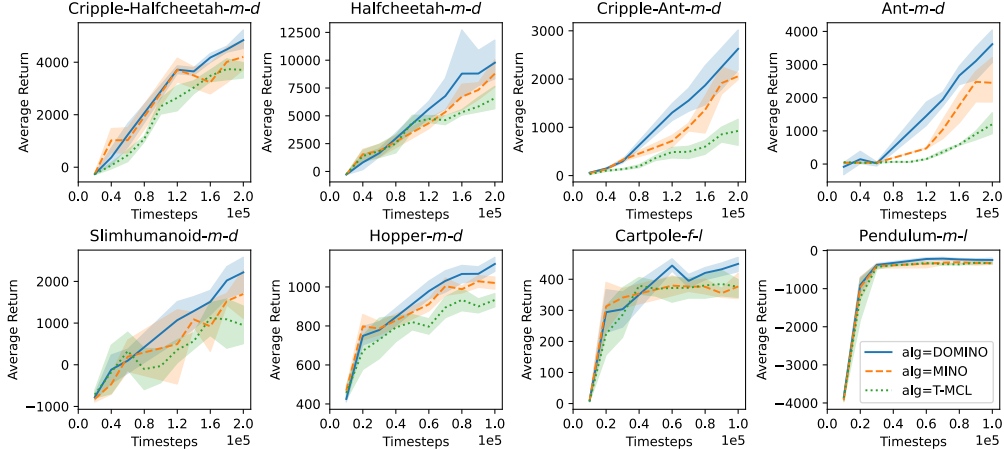


Figure 3: The average returns of the model-based methods in training environments (over 8 seeds).

5 Experiments

In this section, we evaluate the performance of our DOMINO method to answer the following questions: **(1)** Can DOMINO help the model-based RL methods overcome the multi-confounded challenges in dynamics generalization (see comparison with ablation in Figure 3 and Figure 5)? **(2)** Can the context encoder learned by DOMINO be used as a plug-and-play module to improve the generalization abilities of model-free RL methods in multi-confounded environments (see comparison with ablation in Table 1 and Table 2)? **(3)** Can the proposed decomposed MI optimization benefit the forward prediction of the world model? (see Figure 6) **(4)** Does the disentangled context extract more meaningful contextual information than entangled context (see Figure 7)?

5.1 Setups

We demonstrate the effectiveness of our proposed method on 8 benchmarks, which contain 6 typical robotic control tasks based on the MuJoCo physics engine [41] and 2 classical control tasks (CartPole and Pendulum) from OpenAI Gym [42]. Different from previous works, all the environments are influenced by multiple confounders simultaneously. In our experiments, we modify multiple environment parameters at the same time (e.g., mass, length, damping, push force, and crippled leg) that characterize the transition dynamics. The robotic control tasks contain 4 environments (Hopper, HalfCheetah, Ant, SlimHumanoid) affected by multiple continuous confounders and 2 more difficult environments (Crippled Ant and Crippled HalfCheetah) affected by both continuous and discrete confounders. The detailed settings are illustrated in Appendix C (Table 3). We implement these environments based on the publicly available code provide by [43, 4], and we also open-source the code of the multiple-confounded environments². For both training and testing phase, we sample the confounders at the beginning of each episode. During training, we randomly select a combination of confounders from a training set. At test time, we evaluate each algorithm in unseen environments with confounders outside the training range.

5.2 Comparison with Model-based Methods

Baselines. We consider T-MCL [3] and RIA[16] as the key baselines in comparison with model-based methods, which achieve the state-of-the-art results in zero-shot dynamics generalization tasks. Since RIA doesn't have an adaptive planning process, we provide the DOMINO and T-MCL without adaptive planning to fair compare to the RIA. We also consider an *ablation version* of DOMINO as a baseline (denoted as MINO) to show the effectiveness of the decomposed MI optimization, which optimizes the MI and predicts the future states with an entangled context without decomposition.

Figure 5 shows the generalization performance tested in the unseen environments. The results show that DOMINO surpasses T-MCL in terms of the generalization performance and the learning sample

²<https://anonymous.4open.science/r/Multiple-confounded-Mujoco-Envs-01F3>

Results. As shown in Figure 9, DOMINO achieves better generalization performance than RIA and TMCL even without the adaptive planning, especially in complex environments like Halfcheetah- $m-d$ and Slim-humanoid- $m-d$. Figure 3 shows the average return during the learning process in the training environments. The results illustrate that DOMINO learns the policy more efficiently than T-MCL and MINO.

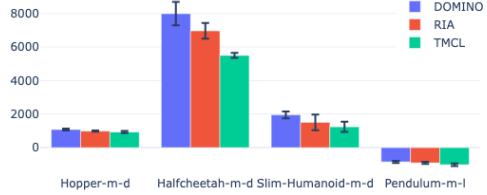


Figure 4: Comparison w/o adaptive planning

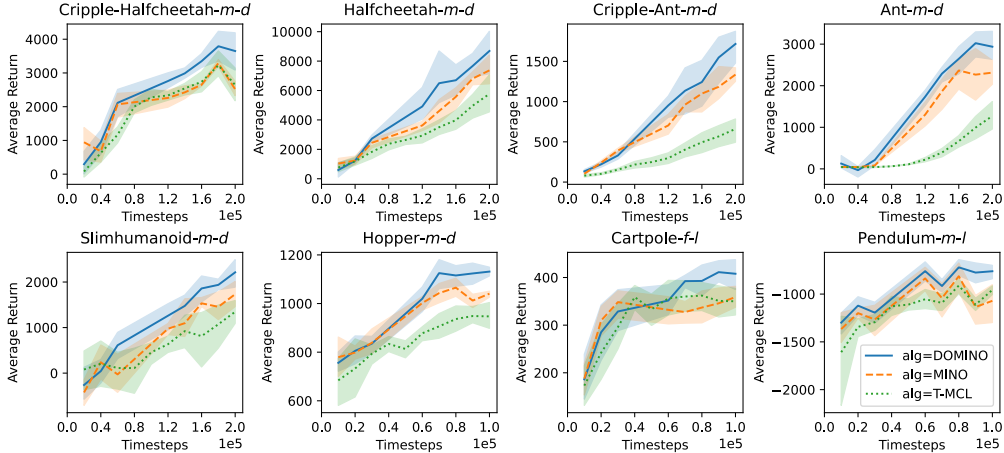


Figure 5: Comparison with *model-based methods* of the generalization performance (average return) in unseen multi-confounded environments (over 8 seeds).

efficiency. This demonstrates that the disentangled context improves the context-aware world model. Especially, the performance gain becomes much more significant in more complex environments (e.g., long-horizon and high-dimensional domains like Cripple-Ant, Ant, and Hopper). For example, DOMINO achieves about 2.6 times improvement to T-MCL in Cripple-Ant- $m-d$, which is one of the most difficult environment, whose leg will randomly be crippled, and its mass and damping will be changed in testing. More details are shown in Appendix D.

5.3 Comparison with Model-free Methods

We also verify whether the learned disentangled context is useful for improving the generalization performance of model-free RL methods. Similar to [3, 44], we use the Proximal Policy Optimization (PPO [40]) method to train the agents.

Baselines. Our proposed method, which takes the context learned by DOMINO as conditional input (PPO+DOMINO), is compared with several context-conditional policies [45, 39]. Specifically, we consider combining the PPO with the context learned by T-MCL (PPO+T-MCL), which learns the context encoder via a context-aware world model and achieves the state-of-the-art performance on dynamics generalization. We also consider PEARL [45], which learns probabilistic context variable by maximizing the expected returns. We further develop an *ablation version* of DOMINO, which optimize the MI with entangled context (PPO+MINO) as a baseline to illustrate the effectiveness of the decomposed MI optimization. We provide more detailed explanations in Appendix D.

Results. Table 1 and Table 2 show the performance of various model-free RL methods on both training and test environments. PPO+DOMINO shows superior performance and shows better generalization performances than previous conditional policy methods, implying that the proposed DOMINO method can extract contextual information more effectively than both the context learned by the model-based method (PPO+T-MCL) and the context learned by the model-free method (PEARL). Furthermore, PPO+DOMINO shows an obvious advantage over PPO+MINO, especially in complex environments, such as HalfCheetah, Ant, and Hopper, which implies that the decomposed

MI optimization improves the context learning significantly. Additionally, the results also show that compared to PEARL, the context learned by T-MCL and DOMINO has better performance which implies that the state transition prediction can help to extract contextual information more effectively.

Table 1: Comparison with *model-free* methods in the multi-confounded environments (over 5 seeds). The transition dynamics will change in both training and test environments in every episode.

| | Cartpole- <i>f-l</i> | | Pendulum- <i>m-l</i> | | Ant- <i>m-d</i> | |
|------------|-------------------------|-----------------|--------------------------|------------------|--------------------|-----------------|
| | Train | Test | Train | Test | Train | Test |
| PEARL | 197±12 | 175±37 | -1265±173 | -1293±134 | 153±63 | 73±25 |
| PPO+T-MCL | 220±27 | 182±25 | -558±184 | -579±128 | 176±82 | 173±38 |
| PPO+MINO | 267±18 | 234±46 | -497±162 | -526±219 | 194±95 | 184±47 |
| PPO+DOMINO | 299±23 | 283±68 | -405±139 | -436±146 | 227±86 | 216±52 |
| | Halfcheetah- <i>m-d</i> | | Slimhumanoid- <i>m-d</i> | | Hopper- <i>m-d</i> | |
| | Train | Test | Train | Test | Train | Test |
| PEARL | 1802±773 | 530±270 | 6947±3541 | 3697±2674 | 934±242 | 874±366 |
| PPO+T-MCL | 2032±688 | 674±395 | 6157±1435 | 4136±1528 | 937±252 | 896±238 |
| PPO+MINO | 1973±563 | 824±498 | 6179±1123 | 4275±1134 | 1109±349 | 964±323 |
| PPO+DOMINO | 2472±803 | 1034±476 | 7825±1256 | 5258±1039 | 1409±254 | 1137±335 |

5.4 Disentangled Context Analysis

Prediction errors. To show that our method indeed helps with a transition prediction, we compare baseline methods with DOMINO in terms of prediction error across 8 environments with varying multiple confounders. As shown in Figure 6, our model demonstrates superior prediction performance, which indicates that the learned context capture better contextual information compare with entangled context (see more results in Appendix E.1).

Visualization. We visualize concatenation of the disentangled context vectors learned by DOMINO via t-SNE [46] and compare it with the entangled context learned by T-MCL. As shown in Figure 7, we find that the disentangled context vectors encoded from trajectories collected under different confounder settings could be more clearly distinguished in the embedding space than the entangled context learned by T-MCL. This indicates that DOMINO extracts high-quality task-specific information from the environment compared with T-MCL. We provide more visualization results based on both t-SNE [46] and PCA [47] in Appendix F.2.

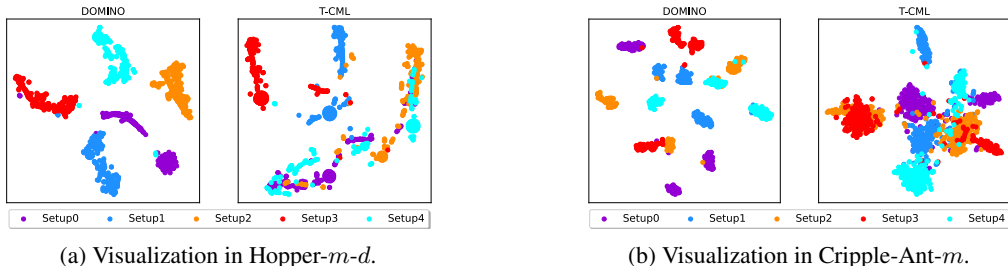


Figure 7: t-SNE visualization of context vectors extracted from trajectories collected in various environments. Embedded points from environments with the same confounders have the same color. Hopper setups: *Setup0* ($m = 0.75, d = 1.5$), *Setup1* ($m = 1.5, d = 1.25$), *Setup2* ($m = 0.5, d = 1.25$), *Setup3* ($m = 1.25, d = 0.75$), *Setup4* ($m = 1.0, d = 1.5$); Cripple-Ant setups: *Setup0* ($m = 1.15, leg = 3$), *Setup1* ($m = 0.75, leg = 1$), *Setup2* ($m = 1.25, leg = 0$), *Setup3* ($m = 0.85, leg = 0$), *Setup4* ($m = 1.0, leg = 2$)(20 trajectories per setup).

6 Conclusion

In this paper, we propose a decomposed mutual information optimization (DOMINO) framework to learn the generalized context for zero-shot dynamics generalization. The disentangled context is learned by maximizing the mutual information between the context and historical trajectories while minimizing the state transition prediction error. By decomposing the whole mutual information

Table 2: Comparison with *model-free* methods in more difficult multi-confounded environments (over 5 seeds).

| | Cripple-Ant- <i>m-d</i> | | Cripple-Halfcheetah- <i>m-d</i> | |
|------------|-------------------------|---------------|---------------------------------|-----------------|
| | Train | Test | Train | Test |
| PEARL | 182±73 | 96 ±21 | 2538±783 | 1028±445 |
| PPO+T-MCL | 187±65 | 109±36 | 2368±726 | 1006±434 |
| PPO+MINO | 206±64 | 113±34 | 2493±664 | 1197±424 |
| PPO+DOMINO | 233±82 | 132±27 | 2503±658 | 1326±491 |

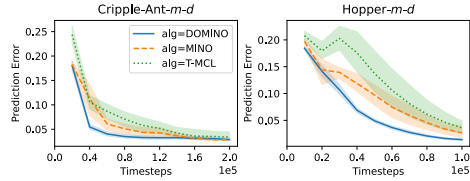


Figure 6: The testing prediction error.

optimization problem into smaller ones, DOMINO can reduce the need for samples collected in various environments and overcome the underestimation of the mutual information in multi-confounded environments. Extensive experiments illustrate that DOMINO benefits the generalization performance in unseen environments with both model-based RL and model-free RL. For future work, an effective combination of DOMINO and RIA [16], which expands the decomposed MI optimization to relational intervention approach proposed by RIA could become a stronger baseline for unsupervised dynamics generalization. We believe our work can lay the foundation of dynamics generalization in complex environments.

Limitations and Negative Social Impact. DOMINO sets the number of disentangled context vectors as a hyper-parameter equal to the number of confounders in the environments, and capturing the number of confounders automatically could be future works. We believe that DOMINO will not cause any negative social impact.

Acknowledgments and Disclosure of Funding

The authors would like to thank the anonymous reviewers for their valuable comments and helpful suggestions. The work is supported by Huawei Noah’s Ark Lab; Ping Luo is supported by the General Research Fund of HK No.27208720, No.17212120, and No.17200622.

References

- [1] Kate Rakelly, Aurick Zhou, Chelsea Finn, Sergey Levine, and Deirdre Quillen. Efficient off-policy meta-reinforcement learning via probabilistic context variables. In *Proceedings of the 36th International Conference on Machine Learning, ICML 2019*, pages 5331–5340, 2019.
- [2] Rasool Fakoor, Pratik Chaudhari, Stefano Soatto, and Alexander J. Smola. Meta-q-learning. In *8th International Conference on Learning Representations, ICLR 2020*. OpenReview.net, 2020.
- [3] Kimin Lee, Younggyo Seo, Seunghyun Lee, Honglak Lee, and Jinwoo Shin. Context-aware dynamics model for generalization in model-based reinforcement learning. In *International Conference on Machine Learning*, 2020.
- [4] Younggyo Seo, Kimin Lee, Ignasi Clavera, Thanard Kurutach, Jinwoo Shin, and Pieter Abbeel. Trajectory-wise multiple choice learning for dynamics generalization in reinforcement learning. *arXiv preprint arXiv:2010.13303*, 2020.
- [5] Haotian Fu, Hongyao Tang, Jianye Hao, Chen Chen, Xidong Feng, Dong Li, and Wulong Liu. Towards effective context for meta-reinforcement learning: an approach based on contrastive learning. *arXiv preprint arXiv:2009.13891*, 2020.
- [6] Bernie Wang, Simon Xu, Kurt Keutzer, Yang Gao, and Bichen Wu. Improving context-based meta-reinforcement learning with self-supervised trajectory contrastive learning. *arXiv preprint arXiv:2103.06386*, 2021.
- [7] Lanqing Li, Yuanhao Huang, Mingzhe Chen, Siteng Luo, Dijun Luo, and Junzhou Huang. Provably improved context-based offline meta-rl with attention and contrastive learning. *arXiv preprint arXiv:2102.10774*, 2021.
- [8] Tong Sang, Hongyao Tang, Yi Ma, Jianye Hao, Yan Zheng, Zhaopeng Meng, Boyan Li, and Zhen Wang. Pandr: Fast adaptation to new environments from offline experiences via decoupling policy and environment representations. *arXiv preprint arXiv:2204.02877*, 2022.

- [9] Aaron van den Oord, Yazhe Li, and Oriol Vinyals. Representation learning with contrastive predictive coding. *arXiv preprint arXiv:1807.03748*, 2018.
- [10] Michael Dennis, Natasha Jaques, Eugene Vinitzky, Alexandre Bayen, Stuart Russell, Andrew Critch, and Sergey Levine. Emergent complexity and zero-shot transfer via unsupervised environment design. *Advances in neural information processing systems*, 33:13049–13061, 2020.
- [11] Minqi Jiang, Edward Grefenstette, and Tim Rocktäschel. Prioritized level replay. In *International Conference on Machine Learning*, pages 4940–4950. PMLR, 2021.
- [12] Minqi Jiang, Michael Dennis, Jack Parker-Holder, Jakob Foerster, Edward Grefenstette, and Tim Rocktäschel. Replay-guided adversarial environment design. *Advances in Neural Information Processing Systems*, 34:1884–1897, 2021.
- [13] Jack Parker-Holder, Minqi Jiang, Michael Dennis, Mikayel Samvelyan, Jakob Foerster, Edward Grefenstette, and Tim Rocktäschel. Evolving curricula with regret-based environment design. *arXiv preprint arXiv:2203.01302*, 2022.
- [14] Roberta Raileanu and Rob Fergus. Decoupling value and policy for generalization in reinforcement learning. In *International Conference on Machine Learning*, pages 8787–8798. PMLR, 2021.
- [15] Karl Cobbe, Christopher Hesse, Jacob Hilton, and John Schulman. Leveraging procedural generation to benchmark reinforcement learning, arxiv. *arXiv preprint arXiv:1912.01588*, 2019.
- [16] Jiaxian Guo, Mingming Gong, and Dacheng Tao. A relational intervention approach for unsupervised dynamics generalization in model-based reinforcement learning. In *International Conference on Learning Representations*, 2022.
- [17] Alessandro Sordoni, Nouha Dziri, Hannes Schulz, Geoff Gordon, Philip Bachman, and Remi Tachet Des Combes. Decomposed mutual information estimation for contrastive representation learning. In *International Conference on Machine Learning*, pages 9859–9869. PMLR, 2021.
- [18] David McAllester and Karl Stratos. Formal limitations on the measurement of mutual information. In *International Conference on Artificial Intelligence and Statistics*, pages 875–884. PMLR, 2020.
- [19] Karl Stratos. Mutual information maximization for simple and accurate part-of-speech induction. *arXiv preprint arXiv:1804.07849*, 2018.
- [20] Juergen Schmidhuber. Evolutionary principles in self-referential learning. 1987.
- [21] Sebastian Thrun and Lorien Y. Pratt. Learning to learn. In *Springer US*, 1998.
- [22] Chelsea Finn, Pieter Abbeel, and Sergey Levine. Model-agnostic meta-learning for fast adaptation of deep networks. In *Proceedings of the 34th International Conference on Machine Learning, ICML 2017*, pages 1126–1135, 2017.
- [23] Jonas Rothfuss, Dennis Lee, Ignasi Clavera, Tamim Asfour, and Pieter Abbeel. Promp: Proximal meta-policy search. In *7th International Conference on Learning Representations, ICLR 2019*, 2019.
- [24] H. Liu, R. Socher, and Caiming Xiong. Taming maml: Efficient unbiased meta-reinforcement learning. In *ICML*, 2019.
- [25] A. Gupta, R. Mendonca, Yuxuan Liu, P. Abbeel, and S. Levine. Meta-reinforcement learning of structured exploration strategies. In *NeurIPS*, 2018.
- [26] Kimin Lee, Younggyo Seo, Seunghyun Lee, Honglak Lee, and Jinwoo Shin. Context-aware dynamics model for generalization in model-based reinforcement learning. *CoRR*, abs/2005.06800, 2020.
- [27] Jean-Bastien Grill, Florian Strub, Florent Altché, Corentin Tallec, Pierre H Richemond, Elena Buchatskaya, Carl Doersch, Bernardo Avila Pires, Zhaohan Daniel Guo, Mohammad Gheshlaghi Azar, et al. Bootstrap your own latent: A new approach to self-supervised learning. *arXiv preprint arXiv:2006.07733*, 2020.
- [28] Mathilde Caron, Ishan Misra, Julien Mairal, Priya Goyal, Piotr Bojanowski, and Armand Joulin. Unsupervised learning of visual features by contrasting cluster assignments. *arXiv preprint arXiv:2006.09882*, 2020.
- [29] Tomas Mikolov, Kai Chen, Greg Corrado, and Jeffrey Dean. Efficient estimation of word representations in vector space. *arXiv preprint arXiv:1301.3781*, 2013.

- [30] Bogdan Mazoure, Remi Tachet des Combes, Thang Doan, Philip Bachman, and R Devon Hjelm. Deep reinforcement and infomax learning. 2020.
- [31] Michael U Gutmann and Aapo Hyvärinen. Noise-contrastive estimation of unnormalized statistical models, with applications to natural image statistics. *Journal of Machine Learning Research*, 13:307–361, 2012.
- [32] R Devon Hjelm, Alex Fedorov, Samuel Lavoie-Marchildon, Karan Grewal, Phil Bachman, Adam Trischler, and Yoshua Bengio. Learning deep representations by mutual information estimation and maximization. 2019.
- [33] Jiaming Song and Stefano Ermon. Understanding the limitations of variational mutual information estimators. 2019.
- [34] Richard S Sutton and Andrew G Barto. *Reinforcement learning: An introduction*. MIT Press, 2018.
- [35] Zdravko I Botev, Dirk P Kroese, Reuven Y Rubinstein, and Pierre L’Ecuyer. The cross-entropy method for optimization. In *Handbook of statistics*. Elsevier, 2013.
- [36] Carlos E Garcia, David M Prett, and Manfred Morari. Model predictive control: theory and practice—a survey. *Automatica*, 25(3):335–348, 1989.
- [37] Wenhao Yu, Jie Tan, C Karen Liu, and Greg Turk. Preparing for the unknown: Learning a universal policy with online system identification. In *RSS*, 2018.
- [38] Charles Packer, Katelyn Gao, Jernej Kos, Philipp Krähenbühl, Vladlen Koltun, and Dawn Song. Assessing generalization in deep reinforcement learning. *arXiv preprint arXiv:1810.12282*, 2018.
- [39] Wenxuan Zhou, Lerrel Pinto, and Abhinav Gupta. Environment probing interaction policies. In *ICLR*, 2019.
- [40] John Schulman, Filip Wolski, Prafulla Dhariwal, Alec Radford, and Oleg Klimov. Proximal policy optimization algorithms. *arXiv preprint arXiv:1707.06347*, 2017.
- [41] Emanuel Todorov, Tom Erez, and Yuval Tassa. Mujoco: A physics engine for model-based control. In *IROS*, 2012.
- [42] Greg Brockman, Vicki Cheung, Ludwig Pettersson, Jonas Schneider, John Schulman, Jie Tang, and Wojciech Zaremba. Openai gym. *arXiv preprint arXiv:1606.01540*, 2016.
- [43] Anusha Nagabandi, Ignasi Clavera, Simin Liu, Ronald S Fearing, Pieter Abbeel, Sergey Levine, and Chelsea Finn. Learning to adapt in dynamic, real-world environments through meta-reinforcement learning. In *ICLR*, 2019.
- [44] Peter Henderson, Riashat Islam, Philip Bachman, Joelle Pineau, Doina Precup, and David Meger. Deep reinforcement learning that matters. In *AAAI*, 2018.
- [45] Kate Rakelly, Aurick Zhou, Deirdre Quillen, Chelsea Finn, and Sergey Levine. Efficient off-policy meta-reinforcement learning via probabilistic context variables. In *ICML*, 2019.
- [46] Laurens van der Maaten and Geoffrey Hinton. Visualizing data using t-sne. *Journal of Machine Learning Research*, 9(Nov):2579–2605, 2008.
- [47] Ian T Jolliffe. *Principal component analysis for special types of data*. Springer, 2002.
- [48] David Barber and Felix Agakov. The im algorithm: A variational approach to information maximization. page 201–208, 2003.
- [49] Chris Cremer, Quaid Morris, and David Duvenaud. Reinterpreting importance-weighted autoencoders. 2017.
- [50] Diederik P Kingma and Jimmy Ba. Adam: A method for stochastic optimization. In *ICLR*, 2015.
- [51] John Schulman, Philipp Moritz, Sergey Levine, Michael Jordan, and Pieter Abbeel. High-dimensional continuous control using generalized advantage estimation. In *ICLR*, 2016.
- [52] Luisa Zintgraf, Kyriacos Shiarlis, Maximilian Igl, Sebastian Schulze, Yarin Gal, Katja Hofmann, and Shimon Whiteson. Varibad: A very good method for bayes-adaptive deep rl via meta-learning. *arXiv preprint arXiv:1910.08348*, 2019.

Checklist

1. For all authors...
 - (a) Do the main claims made in the abstract and introduction accurately reflect the paper’s contributions and scope? [\[Yes\]](#)
 - (b) Did you describe the limitations of your work? [\[Yes\]](#)
 - (c) Did you discuss any potential negative societal impacts of your work? [\[Yes\]](#)
 - (d) Have you read the ethics review guidelines and ensured that your paper conforms to them? [\[Yes\]](#)
2. If you are including theoretical results...
 - (a) Did you state the full set of assumptions of all theoretical results? [\[Yes\]](#) See Section 4.2.
 - (b) Did you include complete proofs of all theoretical results? [\[Yes\]](#) See Section 4.2 and Appendix A.
3. If you ran experiments...
 - (a) Did you include the code, data, and instructions needed to reproduce the main experimental results (either in the supplemental material or as a URL)? [\[Yes\]](#) See Section 5.1 and Appendix D.
 - (b) Did you specify all the training details (e.g., data splits, hyperparameters, how they were chosen)? [\[Yes\]](#) See Appendix D.
 - (c) Did you report error bars (e.g., with respect to the random seed after running experiments multiple times)? [\[Yes\]](#) See Section 5.
 - (d) Did you include the total amount of compute and the type of resources used (e.g., type of GPUs, internal cluster, or cloud provider)? [\[Yes\]](#) See Appendix D.
4. If you are using existing assets (e.g., code, data, models) or curating/releasing new assets...
 - (a) If your work uses existing assets, did you cite the creators? [\[Yes\]](#)
 - (b) Did you mention the license of the assets? [\[N/A\]](#)
 - (c) Did you include any new assets either in the supplemental material or as a URL? [\[Yes\]](#)
 - (d) Did you discuss whether and how consent was obtained from people whose data you’re using/curating? [\[N/A\]](#)
 - (e) Did you discuss whether the data you are using/curating contains personally identifiable information or offensive content? [\[N/A\]](#)
5. If you used crowdsourcing or conducted research with human subjects...
 - (a) Did you include the full text of instructions given to participants and screenshots, if applicable? [\[N/A\]](#)
 - (b) Did you describe any potential participant risks, with links to Institutional Review Board (IRB) approvals, if applicable? [\[N/A\]](#)
 - (c) Did you include the estimated hourly wage paid to participants and the total amount spent on participant compensation? [\[N/A\]](#)